



Main Features:-

- ♦ Full Bore Ball Valve With 2 Pieces Connector
- ♦ 1/2" to 1 1/4" PN25
- ♦ BSP M-F Ends
- ♦ Working Temperature -20°C to 110°C *

*Temperature and pressure determined by valve body, seat etc.

Suitable Applications & Approvals:



HVAC



OIL



GAS



INDUSTRY





SERIES: 80060

MANUFACTURER: **GENEBRE**

VALVE MATERIALS & DIMENSIONS

ITEM	SECTION	MATERIAL	ADDITIONAL INFO / OPTIONS
1	Body	Brass	Peened + Chromed
2	Cap	Brass	Peened + Chromed
3	Ball	Brass	Chrome Plated
4	Stem	Brass	Chrome Plated
5	Ball Seat	PTFE	n/a
6	Stem Packing	PTFE	n/a
7	O'Ring	NBR	n/a
8	Stem Ring	Brass	Chrome Plated
9	Nut	Brass	Chrome Plated
10	T-Handle	Aluminium	Painted
11	Nut	Brass	Chrome Plated

REF	SIZE	P	A	L	M	Kg
80060-04	1/2"	14	36	69	50	0.185
80060-05	3/4"	19	44	76	62	0.305
80060-06	1"	24	48	92	62	0.490
80060-07	1 1/4"	30	57	106	78	0.715

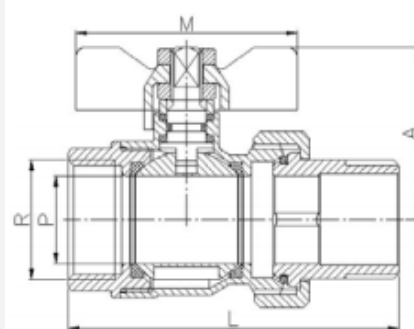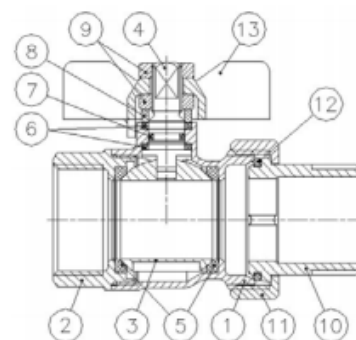



Genebre are a global brand of industrial valves with large stocks held for fast delivery on various type of valves, sizes, end connections and materials.


SERIES: 80060

REF	SIZE	TORQUE Nm	REF	SIZE	Kv
80060-04	1/2"	N/A	80060-04	1/2"	16
80060-05	3/4"	N/A	80060-05	3/4"	30
80060-06	1"	N/A	80060-06	1"	45
80060-07	1 1/4"	N/A	80060-07	1 1/4"	70

- The liquid listed in the table are initial breakaway torques, taken with liquids and lubricant media.

- Please regard these as approximate values, as the objective value on different factors like pressure, medium, rubber

PRESSURE AND TEMPERATURE CHART

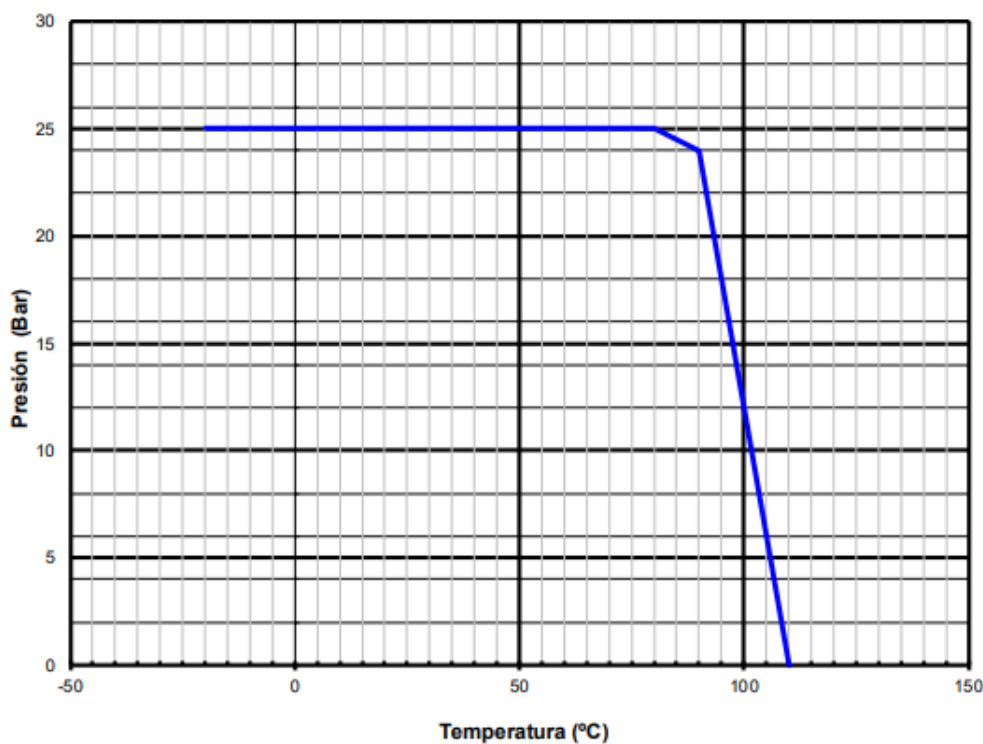

GENEBRE

Genebre is a leading company and world reference in fluid control and high-quality taps. They control all the creation processes, responding to the specific needs of each market: from the initial concept and design of the product to the production and commercialization.

