VALVE MATERIALS & DIMENSIONS

ALLVALVES

Main Features: -

- Ball Check Valve
- ◆ 11/4" to 2" PN16
- Installed with vertical or horizontal flow
- Working Temperature 0 to + 90C *
- Alluminium Ball and NBR coated

*Temperature and pressure determined by valve body, seat etc.

Suitable Applications & Approvals:









GAS INDUSTR





SERIES: 80211




ADDITIONAL INFO / OPTIONS **ITEM SECTION MATERIAL Outlet End AISI 316** 1 n/a 2 Gasket **NBR** n/a 3 Cap **AISI 316** n/a 4 Nut SS 316 n/a 5 SS 316 Bolt n/a 6 Body **AISI 316** n/a 7 Ball Aluminium +NBR n/a 8 Inlet End **AISI 316** n/a

REF	SIZE	PN	Α	В	С	Kg	
80211-07	11/4"	16	175	99	50	1.1	
80211-08	11/2"	16	190	99	50	1.18	
80211-09	2"	16	210	112	60	1.61	





HEAD LOSSES DIAGRAM

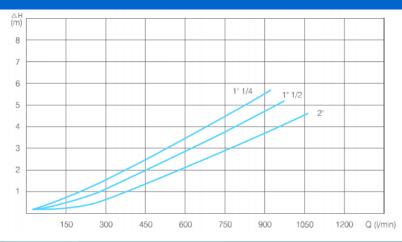

GENEBRE

Genebre is a leading company and world reference in fluid control and high-quality taps. They control all the creation processes, responding to the specific needs of each market: from the initial concept and design of the product to the production and commercialization.



+44 (0)1386 552369

sales@allvalves.co.uk



www.allvalves.co.uk



+44 (0)1386 554227