Main Features: -

- Gate Valve
- Non-rising stem
- NPT Threaded Ends
- Max. Working pressure 16 bar.
- Working temperature -30°C / 180 °C

*Temperature and pressure determined by valve body, seat etc.

Suitable Applications & Approvals:











SERIES: 80224

MANUFACTURER: **GENEBRE**

HVAC

VALVE MATERIALS


•	3	2	2
	01	L	




2

ITEM	SECTION	MATERIAL	ADDITIONAL INFO / OPTIONS
1	Body	SS 1.4408	Shot Blasting
2	Bonnet	SS 1.4408	Shot Balsting
3	Washer	Ss 304	n/a
4	Stem	Ss 316	n/a
5	Stem Packing	PTFE	n/a
6	Nut	SS 304	n/a
7	Handwheel	Aluminium	Painted
8	Packing Nut	SS 1.4408	n/a
9	Stem Packing	Ss 316	n/a
10	Lock Nut	Ss 316	n/a
11	Body Gasket	PTFE	n/a
12	Wedge	Ss 1.4408	Shot Balsting

REF	SIZE	PN	R	Α	L	V	Kg
80224-04	1/2"	16	1/2"	100	55	70	0.414
80224-05	3/4"	16	3/4"	110	61	70	0.578
80224-06	1"	16	1"	115	68	70	0.740
80224-07	11/4"	16	11/4"	130	77	80	0.995
80224-08	11/2"	16	11/2"	150	80	100	1.550
80224-09	2"	16	2"	167	93	100	2.150
















Genebre are a global brand of industrial valves with large stocks held for fast delivery on various type of valves, sizes, end connections and materials.

SERIES: 80224

REF	SIZE	Kv	KV VALUES:
80224-04	1/2"	4.5	- The Kv values (M3 per hour) is the
80224-05	3/4"	20	flow of water at a temperature of
80224-06	1"	34	5C to 30C (41F to 86F) at p of 1 bar
80224-07	11/4"	60	 For further information, please email sales@allvalves.co.uk
80224-08	11/2"	102	
80224-09	2"	161	

PRESSURE TEMPERATURE RATING

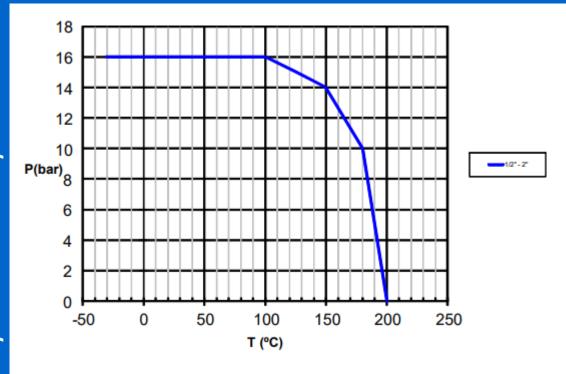

ALL VALVES

Offering a full range of actuated valve packages, manual valve range, pipe fittings and pumps, we have a product for all your requirements. As an ISO 9001-2015 Quality Approved and certified company, All Valves offer a quality service from pre-sale to post sale. Shipping millions of pounds in value of manual valve and actuated valve packages all over the world since its formation, All Valves are a trusted valve and actuator supplier to many companies all over the world. Working with the leading brands in most industries.











