



## Main Features:-

- ◆ Pressure reducing valve - Direct Action
- ◆ Threaded ends ISO 7-1 (EN 10226-1)
- ◆ Body in Stainless Steel 1.4408 (CF8M)
- ◆ Working temperature from -15 °C to 120 °C
- ◆ Maximum working pressure 25 bar

\*Temperature and pressure determined by valve body, seat etc.

## Suitable Applications & Approvals:



HVAC



OIL



GAS



INDUSTRY





## SERIES: 80260

MANUFACTURER: **GENEBRE**

VALVE MATERIALS

ITEM	SECTION	MATERIAL	ADDITIONAL INFO / OPTIONS
1	Body	SS 1.4408	Pickling + Blasting
2	Bottom Cover	SS 1.4408	Pickling + Blasting
3	Top Cover	SS 1.4408	Pickling + Blasting
4	Plug	SS 304	n/a
5	Piston	SS 1.4408	n/a
6	U'Ring	FPM	n/a
7	O'Ring	FPM	n/a
8	Seat	FPM	n/a
9	Diaphragm	FPM	n/a
10-12	O'Ring	FPM	n/a
13	Spring	Spring Steel	Painted
14	Spring Guide	SS 1.4308	n/a
15	Nut	SS 304	n/a
16	Adjusting Screw	SS 304	n/a

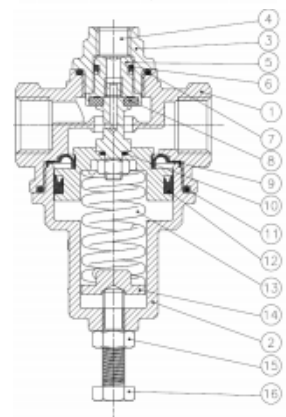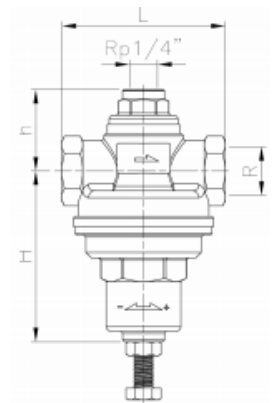

ITEM	Size	PN	H	h	L	Kv	Kg
80260-04	1/2"	25	72	34	70	2.1	0.775
80260-05	3/4"	25	75	38	85	3.4	0.890
80260-06	1"	25	75	46	92	5.5	1.095



T +44 (0)1386 552369

E sales@allvalves.co.uk

W www.allvalves.co.uk

F +44 (0)1386 554227




Genebre are a global brand of industrial valves with large stocks held for fast delivery on various type of valves, sizes, end connections and materials.

**SERIES: 80260**

## Headloss Chart

## ALLVALVES

AllValves Online™ have used decades of experience in the valve industry to select a range of products that match the Allvalves Online ethos - value for money. All Valves Products are from reputable sources and have been sold in significant quantities for many years, are installed in a wide variety of applications, and are known to be durable in service.

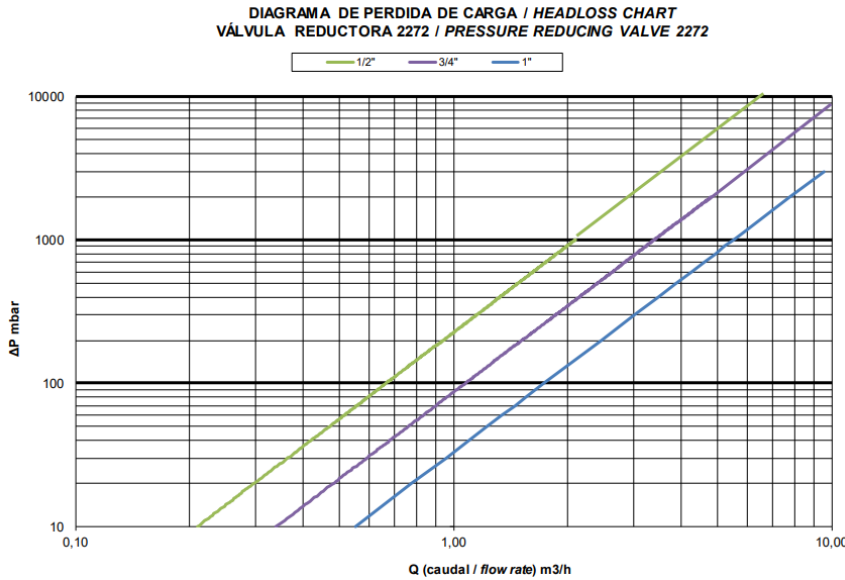

TORQUE / Kv VALUES / DIMENSIONS



T +44 (0)1386 552369

W [www.allvalves.co.uk](http://www.allvalves.co.uk)

E [sales@allvalves.co.uk](mailto:sales@allvalves.co.uk)

F +44 (0)1386 554227