



## Main Features:-

- ◆ AISI 316 (Casting)
- ◆ 1/4" to 4"
- ◆ BSP F-F Threaded Ends (80408—NPT)
- ◆ Working Temperature -20 to + 220C \*
- ◆ Max. Working pressure 20 Bar

\*Temperature and pressure determined by valve body, seat etc.

## Suitable Applications & Approvals:



HVAC



OIL



GAS



INDUSTRY




## SERIES: 80407

MANUFACTURER: **GENEBRE**

VALVE MATERIALS & DIMENSIONS

Ref	SIZE (R)	A
80407-02	1/4"	19
80407-03	3/8"	23
80407-04	1/2"	27
80407-05	3/4"	32
80407-06	1"	38
80407-07	1 1/4"	45
80407-08	1 1/2"	48
80407-09	2"	57
80407-10	2 1/2"	69
80407-11	3"	78
80407-12	4"	96

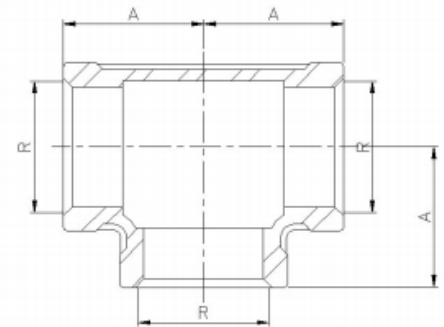

## ALLVALVES

Offering a full range of actuated valve packages, manual valve range, pipe fittings and pumps, we have a product for all your requirements. As an ISO 9001-2015 Quality Approved and certified company, All Valves offer a quality service from pre-sale to post sale. Shipping millions of pounds in value of manual valve and actuated valve packages all over the world since its formation, All Valves are a trusted valve and actuator supplier to many companies all over the world. Working with the leading brands in most industries.



T +44 (0)1386 552369

E sales@allvalves.co.uk

W www.allvalves.co.uk

F +44 (0)1386 554227