



Main Features:-

- ◆ Reducing Socket
- ◆ Made of AISI 316 (Casting)
- ◆ BSP F-F (80414-NPT)
- ◆ Working Temperature -20 to + 220C *
- ◆ Max. Working pressure 20 Bar

*Temperature and pressure determined by valve body, seat etc.

Suitable Applications & Approvals:



HVAC



OIL



GAS



INDUSTRY




SERIES: 80413

MANUFACTURER: **GENEBRE**

VALVE MATERIALS & DIMENSIONS

Ref	SIZE (R1xR2)	L
80413-50	1/4" x 1/8"	25
80413-51	3/8" x 1/4"	26
80413-52	1/2" x 1/4"	34
80413-53	1/2" x 3/8"	34
80413-54	3/4" x 1/2"	36
80413-55	1" x 3/4"	42
80413-56	1 1/4" x 1"	48
80413-57	1 1/2" x 1"	52
80413-58	1 1/2" x 1 1/4"	52
80413-59	2" x 1 1/2"	58
80413-60	2 1/2" x 2"	65

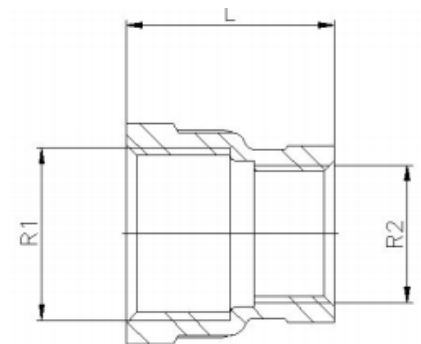

ALLVALVES

Offering a full range of actuated valve packages, manual valve range, pipe fittings and pumps, we have a product for all your requirements. As an ISO 9001-2015 Quality Approved and certified company, All Valves offer a quality service from pre-sale to post sale. Shipping millions of pounds in value of manual valve and actuated valve packages all over the world since its formation, All Valves are a trusted valve and actuator supplier to many companies all over the world. Working with the leading brands in most industries.



T +44 (0)1386 552369

E sales@allvalves.co.uk

W www.allvalves.co.uk

F +44 (0)1386 554227