



## Main Features:-

- ◆ Diaphragm Sanitary Valve
- ◆ Clamp ends according to BS 4825-3 Std
- ◆ Max. Working pressure 10 bar
- ◆ Max. Working Temperature 95 °C
- ◆ Flow direction: Bi-directional

\*Temperature and pressure determined by valve body, seat etc.

## Suitable Applications & Approvals:



HVAC



OIL



GAS



INDUSTRY



## SERIES: 80620



MANUFACTURER: **GENEBRE**

VALVE MATERIALS & DIMENSIONS


ITEM	SECTION	MATERIAL	ADDITIONAL INFO / OPTIONS				
1	Body	SS 316L	Mechanical Polish				
2	Diaphragm	Silicone	Spare Part Code: D2945				
3	Diaphragm Guide	SS 304	-				
4	Cap	SS 304	Mechanical Polish				
5	Stem	SS 304	-				
6	Handwheel	Plastic	-				
7	Nut	SS 304	-				
8	Bolt	SS 304	-				

REF	SIZE	DN	A	B	F	Kg	KV
80620-04	1/2"	15	99.6	25.4	92/106	0.68	4
80620-05	3/4"	19	99.6	25.4	92/106	0.653	9
80620-06	1"	25	129	50.5	110/123	1.2	17
80620-08	1 1/2"	40	159	50.5	139/159	2.6	37
80620-09	2"	50	191	64	159/186	3.3	63

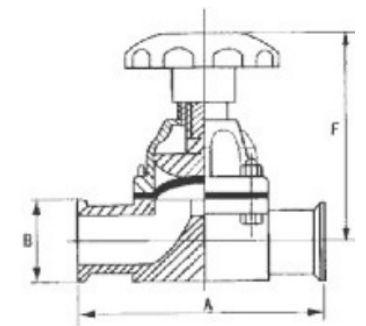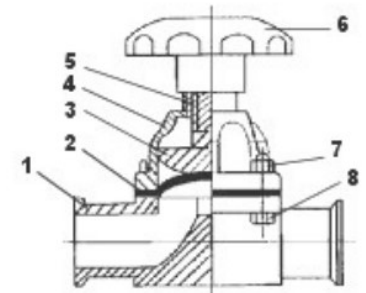

## PRESSURE AND TEMPERATURE CHART

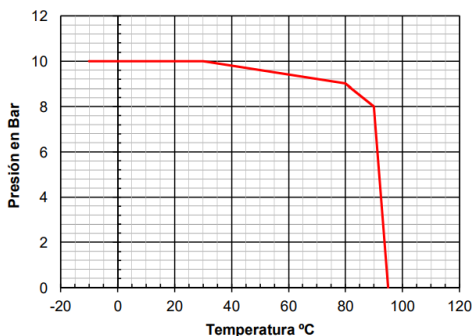

## GENEBRE

Genebre is a leading company and world reference in fluid control and high-quality taps. They control all the creation processes, responding to the specific needs of each market: from the initial concept and design of the product to the production and commercialization.



T +44 (0)1386 552369

E sales@allvalves.co.uk

W www.allvalves.co.uk

F +44 (0)1386 554227