

## Main Features:-

- ◆ Economy Namur Solenoid
- ◆ Available in 24VDC, 24VAC, 110VAC, 220VAC
- ◆ LED Din Plug as standard
- ◆ IP65 for Safe Area use only
- ◆ 5/2 or 3/2

Suitable Applications & Approvals:



**SERIES: 75001-04**

MANUFACTURER: **AVOL**  
INDUSTRIAL VALVES

VOLTAGE	CODE	Length	Height
24VDC	75001	136.5mm	69mm
24VAC	75002	136.5mm	69mm
110VAC	75003	136.5mm	69mm
220VAC	75004	136.5mm	69mm

For use with compressed air


Manual Override as standard

Maximum frequency is 5 cycles per second

5 port 2 position



1/4" BSP Inlet, female threaded

Insulation Class F.

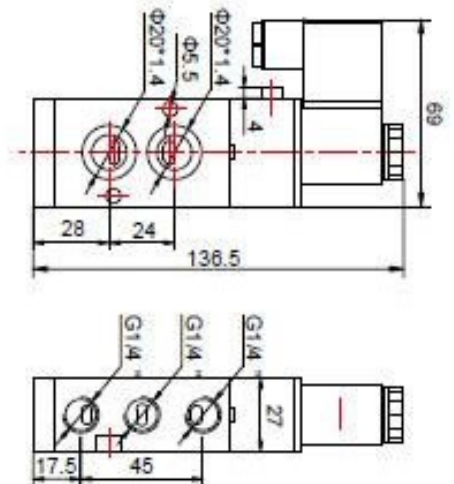

VALVE DIMENSIONS

5/2 DOUBLE ACTING OR 3/2 SPRING RETURN

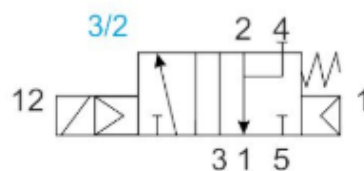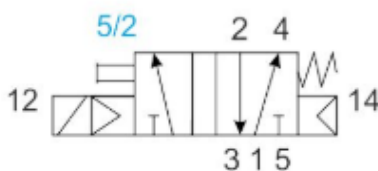

Remember that 5/2 configuration should be used for Double Acting actuators.

3/2 will be used for Single Acting actuators.

MATERIALS OF CONSTRUCTION

BODY	ALUMINIUM
NAMUR	YES
DIN PLUG	LED
IP	IP65
ORINGS	NBR
PRESSURE	8 bar
TEMP	-5 to +60C

T +44 (0)1386 552369

E sales@allvalves.co.uk

W www.allvalves.co.uk

F +44 (0)1386 554227