



## Main Features:-

- ◆ Screwed BSPP
- ◆ Carbon Steel Body
- ◆ Metal Disc, Spring & Seat
- ◆ 5psi Cracking Pressure
- ◆ Temperature -30°C to 100°C

\*Temperature and pressure determined by valve body, seat etc.

## Suitable Applications & Approvals:



## SERIES: 100075

MANUFACTURER: **AVOL**  
INDUSTRIAL VALVES




### Name Materials

Body	Carbon Steel
Seals	NBR
Springs	Carbon Steel

### Size Pressure


1/4" to 1 1/2"	300 Bar
2"	200 Bar

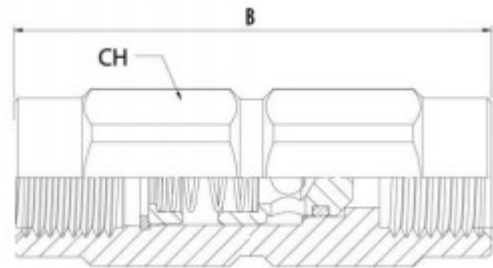

VALVE DIMENSIONS

Size	CH	B	Max Rated Flow	Working Pressure	Max working Pressure
1/4"	19	56	26/ 6.87	300/ 4350	1200/ 17400
3/8"	22	70	44/ 11.6	300/ 4350	1200/ 17400
1/2"	30	77	90/ 23.85	300/ 4350	1200/ 17400
3/4"	36	90	152/ 40.2	300/ 4350	1200/ 17400
1"	46	106	200/ 52.8	300/ 4350	1200/ 17400
1 1/4"	55	125	370/ 97.8	300/ 4350	1200/ 17400
1 1/2"	60	140	598/ 158	300/ 4350	1200/ 17400
2"	75	160	875/ 231	200/ 2900	800/ 11600

## PRESSURE DROP

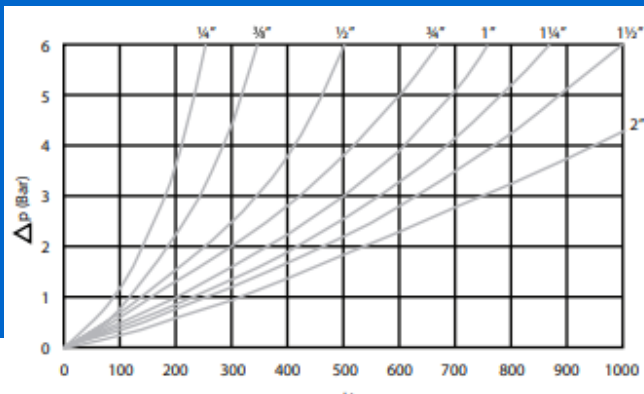

## ALL VALVES ONLINE

Offering a full range of actuated valve packages, manual valve range, pipe fittings and pumps, we have a product for all your requirements. As an ISO 9001-2015 Quality Approved and certified company, All Valves offer a quality service from pre-sale to post sale. Shipping millions of pounds in value of manual valve and actuated valve packages all over the world since its formation, All Valves are a trusted valve and actuator supplier to many companies all over the world.



T +44 (0)1386 552369

E sales@allvalves.co.uk

W www.allvalves.co.uk

F +44 (0)1386 554227