Gate Valves

Main Features: -

- Flanged PN16 (8" Available Flanged PN10)
- Cast Iron Body, Cast Brass Seat
- Non-rising Stem
- Conforms to DIN 3202
- F4 Rated PN16, Temperature -10°C to 120°C

*Temperature and pressure determined by valve body, seat etc.

Suitable Applications & Approvals:



VALVE DIMENSIONS




SERIES: 30088

MANUFACTURER:



No	Name	Materials		
1	Body	Cast Iron		
2	Wedge	Cast Iron		
3	Body Trim	Brass		
4	Wedge Trim	Brass		
5	Stem Nut	Brass		
6	Stem	Stainless Steel Cr13		
7	Bonnet	Cast Iron		
8	O-Ring	EPDM		
9	Gland	Cast Iron		
10	Gasket	Graphite		
11	Handwheel	Cast Iron		

Size	L	Н	D	Kg
1 1/2"	140	230	140	10
2"	150	210	140	11.8
2 1/2"	170	230	160	15
3"	180	265	160	19
4"	190	303	185	26.5
5"	200	375	200	35
6"	210	430	240	50
8"	230	524	240	60
10"	250	650	360	218
12"	270	740	360	128

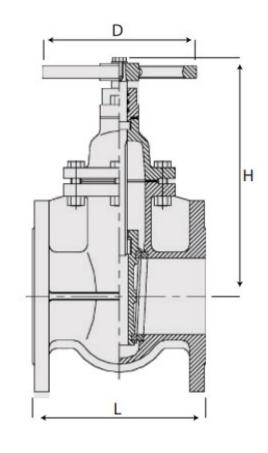

ALL VALVES ONLINE

Offering a full range of actuated valve packages, manual valve range, pipe fittings and pumps, we have a product for all your requirements. As an ISO 9001-2015 Quality Approved and certified company, All Valves offer a quality service from pre-sale to post sale.



+44 (0)1386 552369







E sales@allvalves.co.uk

