

Main Features:-

- ◆ Flanged PN16, ANSI 150
- ◆ Temperature -20°C to 180°C
- ◆ PN16 (30116), CL150 (30117)
- ◆ Rising Stem, Handwheel Operation
- ◆ Stainless Steel Body, Bonnet & Wedge

*Temperature and pressure determined by valve body, seat etc.

Suitable Applications & Approvals:



INDUSTRY



30116-30117


MANUFACTURER:

AVOL
INDUSTRIAL VALVES

SIZE	d	L	H	W
1"	25	127	210	120
1 1/2"	40	165	270	200
2"	50	178	320	200
2 1/2"	65	190	375	200
3"	80	203	445	250
4"	100	229	523	250
6"	150	267	710	300

VALVE DIMENSIONS

No.	Name	Material
1	Body	SCS14/ CF8M
2	Disc	SCS14/ CF8M
3	Bonnet Bolt	ASTM 194-B8
4	Bonnet Nut	ASTM 194-B8
5	Bonnet	SCS14/ CF8M
6	Hinge Pin	SUS 304
7	Eye Bolt	SUS 304
8	Gland	SCS 13
9	Eye Nut	ASTM 194-B8
10	Handwheel	FCD
11	Nut	Bronze
12	Stem	SUS304/ SUS 316
13	Nameplate	SUS 304
14	Spring	Bronze
15	Yoke Sleeve	Bronze
16	Gland Packing	PTFE
17	Packing	PTFE
18	Gasket	PTFE (or No Asbestos)

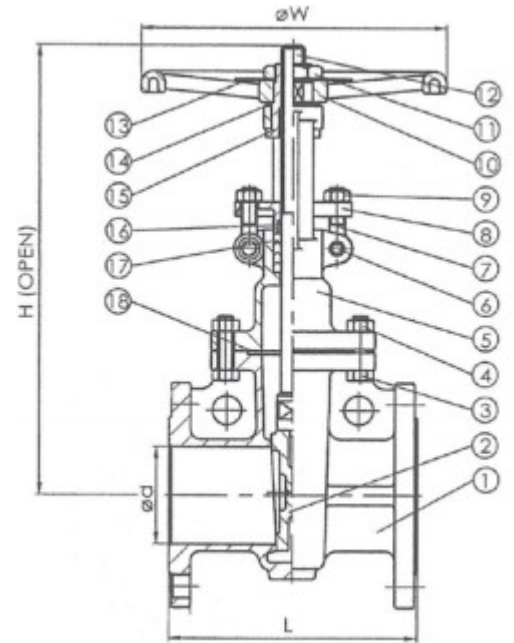

Test Pressure

Shell (By Hydraulic)	450 PSI 32kg/cm ²
Seat (by Hydraulic)	315 PSI 22kg/cm ²
Seat (by Pneumatic)	80 PSI 6kg/cm ²

ALL VALVES

Offering a full range of actuated valve packages, manual valve range, pipe fittings and pumps, we have a product for all your requirements. As an ISO 9001-2015 Quality Approved and certified company, All Valves offer a quality service from pre-sale to post sale.

T +44 (0)1386 552369

W www.allvalves.co.uk

E sales@allvalves.co.uk

F +44 (0)1386 554227