## Main Features: -

- Flanged ANSI 150
- Stainless Steel Body, Cover & Screen
- 1" 1.5mm Mesh, 1½" to 6" 2mm Mesh
- Rated CL150
- Temperature -20°C to 180°C

\*Temperature and pressure determined by valve body, seat etc.

Suitable Applications & Approvals:



VALVE DI MENSI ONS




**SERIES: 30150** 

MANUFACTURER:



Name	Material
Body	CF8M
Cover	CF8M
Gasket	PTFE
Screen	SUS 316
Gland Bolt	SUS 304
Drain Plug	SUS 316

Size	DN	L	D	С	В	T	R	F	Н	Ν	H1	Kg
1"	25	160	108	79.5	25	14	51	1	15	4	77	3.4
11/2"	40	200	127	98.5	40	17	73	2	15	4	115	6.2
2"	50	230	152	120.5	50	18	92	2	19	4	128	9
21/2"	65	290	178	139.5	65	21	105	2	19	4	188	14.5
3"	80	310	190	152.5	80	23	127	2	19	8	200	18.5
4"	100	350	229	190.5	100	23	150	2	19	8	240	27
6"	150	480	279	241.5	150	25	216	2	22	8	300	50





lug Thread specification

1/2 BSPT

	Strainer Size	Drain Pl				
Nominal Size	Perforation	Pitch	Holes	Screen Thick-	11/2" - 6"	
	Р	P1	P2	ness		
1"	1.5	2.5	4	0.4		
11/2" - 6"	2	3.8	7	0.5		

+44 (0)1386 552369

E sales@allvalves.co.uk



w www.allvalves.co.uk





## **Strainers**






AVOL valves are our range of industrial valves selected by our experienced technical sales team.

**SERIES: 30150** 

## Body Pressure/Temperature Chart

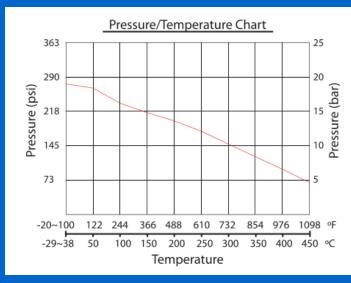

## ALL VALVES ONLINE

Offering a full range of actuated valve packages, manual valve range, pipe fittings and pumps, we have a product for all your requirements. As an ISO 9001-2015 Quality Approved and certified company, All Valves offer a quality service from pre-sale to post sale. Shipping millions of pounds in value of manual valve and actuated valve packages all over the world since its formation, All Valves are a trusted valve and actuator supplier to many companies all over the world. Working with the leading brands in most industries.









