



Strainers

ALLVALVES
O N L I N E

Main Features:-

- ♦ Flanged PN16
- ♦ Cast Iron Body, Stainless Steel Screen
- ♦ Temperature -10°C to 300°C
- ♦ Mesh Sizes: ½" to 2" 1mm, 2½" & 3" 1.25mm, 4" to 16" 1.6mm

*Temperature and pressure determined by valve body, seat etc.

Suitable Applications & Approvals:



SERIES: 30171


MANUFACTURER:

AVOL
INDUSTRIAL VALVES

Name

Materials

Body	EN-GJL-250
Bonnet	EN-GJL-250
Screen	SS 1.4301
Supporting Bonnet	SS 1.4301
Studs	8.8-A2A
Hexagon Nut	SCF 151-2
Emptying Screw	C35E
Plug gasket	A4 1.4571
Bonnet Gasket	CrNiSt—Graphite
Plug	C35E

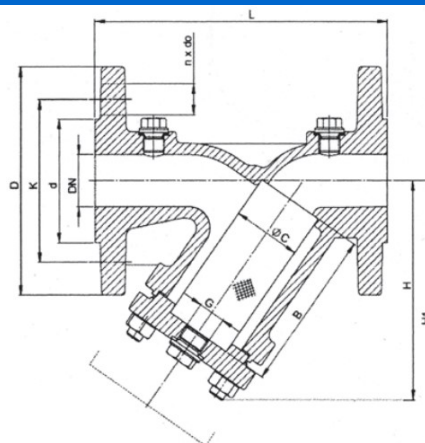

VALVE DIMENSIONS

DN	L	D	d	K	n x do	H	H1	G	Kg	Kv	C	B
15	130	95	46	65	4x14	90	135	3/8	2.6	5.7	23	56
20	150	105	56	75	4x14	100	160	3/8	3.0	10.4	28	68
25	160	115	65	85	4x14	115	180	3/4	4.3	16.4	36	85
32	180	140	76	100	4x19	135	215	3/4	6.8	27.3	42	98
40	200	150	84	110	4x19	150	240	1	8.8	42	50	114
50	230	165	99	125	4x19	160	250	1	11.0	64.7	61.5	119
65	290	185	118	145	4x19	180	285	1	14.6	98	78.5	134
80	310	200	132	160	8x19	215	330	1	18.6	149	89.5	149
100	350	220	156	180	8x19	240	395	1 1/2	27	234	109.5	169
125	400	250	184	210	8x19	280	455	1 1/2	38.5	376	137.5	199
150	480	285	211	240	8x23	330	525	1 1/2	54.5	454	160	224
200	600	340	266	295	12x23	405	650	1 1/2	110	853	210	284
250	730	405	319	355	12x28	540	870	1 1/2	165	1104	258	434
300	850	460	370	410	12x28	680	1110	1 1/2	285	1450	308	555
350	980	520	429	470	16x28	755	1205	1 1/2	373	1800	365	640
400	1100	580	480	525	16x31	835	1370	1 1/2	540	2200	415	695

T +44 (0)1386 552369

E sales@allvalves.co.uk

W www.allvalves.co.uk

F +44 (0)1386 554227

