

Main Features :-

EU Manufactured

To suit Hidroten ball valves only

Replacement Ends

Replacement Actuator brackets

Stocked in the UK

Replacement Seal Kit available

Spare Levers




TYPE: Accessories/Spares



243

Salida encolar
Solvent socket outlet




CÓDIGO	Ø TUBO	PESO (g.)	A	B
11801	20	32	51	16
11802	25	47	58	19
11803	32	68	68	23
11804	40	120	84	25
11805	50	189	99	31
11806	63	295	116	38
11807	75	563	150	45
11808	90	973	178	51
11809	110	1.087	210	61
11815	125	1.450	228	71



784

Salida encolar macho
Male solvent socket outlet




CÓDIGO	Ø TUBO	DN	PESO (g.)	A	B
11710	20	15	37	51	16
11711	25	20	54	58	19
11712	32	25	78	68	23
11713	40	32	138	84	25
11714	50	40	217	99	31
11730	63	50	340	116	38



244

Salida encolar mayorado
Incr. solvent socket outlet



CÓDIGO	Ø TUBO	Ø CUERPO	PESO (g.)	A	B
11812	75	63	323	116	45
11813	90	75	639	150	51
11814	110	90	1.053	178	61
11810	125	110	1.572	210	71
11811	140	110	1.730	228	77
11816	140	125	1.690	228	77



245

Salida rosca hembra
Female threaded outlet




CÓDIGO	r	PESO (g.)	A	B
11821	1/2"	35	51	17
11822	3/4"	51	58	20
11823	1"	72	68	23
11824	1 1/4"	130	84	26
11825	1 1/2"	207	99	33
11826	2"	340	116	29
11827	2 2/2"	574	150	33
11828	3"	1.038	178	36
11829	4"	1.372	210	42

Dimensional Drawings and Additional Technical Specifications:-



593

Salida rosca hembra reforzada
Reinforce female threaded outlet



CÓDIGO	r	PESO (g.)	A	B
11R821	1/2"	45	51	17
11R822	3/4"	63	58	20
11R823	1"	86	68	23
11R824	1 1/4"	148	84	26
11R825	1 1/2"	232	99	33
11R826	2"	375	116	29
11R827	2 1/2"	619	150	33
11R828	3"	1.098	178	36
11R829	4"	1.447	210	42



247

EPDM VITON

Salida fitting
Fitting outlet




CÓDIGO	CÓDIGO	Ø TUBO	PESO (g.)	A	B
11841	11851	20	60	51	65
11842	11852	25	94	58	76
11843	11853	32	139	68	85
11844	11854	40	228	84	100
11845	11855	50	352	99	115
11846	11856	63	558	116	130
11847	11857	75	1.245	150	160
11848	11858	90	2.175	178	190
11849	11859	110	2.950	210	235



505

Salida termofusión
Thermo fusion outlet




CÓDIGO	Ø TUBO	PESO (g.)	A	B
11870	20	62	51	65
11871	25	74	58	65
11872	32	122	68	70
11873	40	210	84	70
11874	50	295	99	79
11875	63	460	116	89
11876	75	1.040	150	91
11877	90	1.620	178	100
11878	110	2.475	210	102
11879	125	3.325	228	135



246

Salida rosca macho
Threaded male outlet




CÓDIGO	r	PESO (g.)	A	B
11831	1/2"	42	51	14
11832	3/4"	59	58	16
11833	1"	86	68	19
11834	1 1/4"	165	84	21
11835	1 1/2"	258	99	22
11836	2"	395	116	25



504

Salida Netvitc®
Netvitc® outlet




CÓDIGO	Ø TUBO	DN	PESO (g.)	A	B
11973	2"	280	116	86	16
11974	3"	1.025	178	132	19

SISTEMA
RANURADO



594

Salida bridas
Flange set




CÓDIGO	Ø	PESO (g.)	A	B	C	K
11B805	50	495	99	72	150	110
11B806	63	680	116	86	165	125
11B807	75	1.175	150	100	185	145
11B808	90	1.750	178	112	200	146-160
11B809	110	2.485	210	136	220	178-190
11B815	125	2.635	228	156	230	190

K= distancia entre tornillos (mm)/ Distance between bolts (mm)



595

Salida bridas mayorado
Flange outlet




CÓDIGO	Ø TUBO	Ø CUERPO	PESO (g.)	A	B	C	K
11B812	75	63	920	116	100	185	145
11B813	90	75	1.435	150	112	200	146-160
11B814	110	90	2.220	178	136	220	178-190
11B810	125	110	2.730	210	156	230	190
11B811	140	110	3.250	210	168	250	210-216
11B816	140	125	3.070	228	168	250	210-216

K= distancia entre tornillos (mm)/ Distance between bolts (mm)



59N

Adaptador válv. bola SNS®
SNS® ball valve outlet



CÓDIGO	Ø	BRIDA	PESO (g.)	A	B	C
1N806	63	63	259	92	116	62
1N807	75	75	575	101	150	70
1N808	90	90	981	121	178	83
1N809	110	110	1.370	144	210	89
1N810	125	125	1.480	159	230	81

SNS CONEXION


Dimensional Drawings and Additional Technical Specifications:-



595

Ø110-140

Maneta modelo basic
Handle basic system




CÓDIGO	Ø VÁLVULA	PESO (g.)	A	B
11952	20-25	13	73	29
11953	32	22	110	38
11954	40-50	41	120	48
11955	63	66	178	53
11956	75-90	162	260	83
11957	110 DN100	237	280	85



821


DN 113-125

Maneta modelo gatillo
Catch handle



CÓDIGO	Ø VÁLVULA	PESO (g.)	A	B	C
11967	63-90	347	275	235	70
11968	DN 100	370	310	270	70
11966	DN 113-125	460	510	330	70

MANUAL

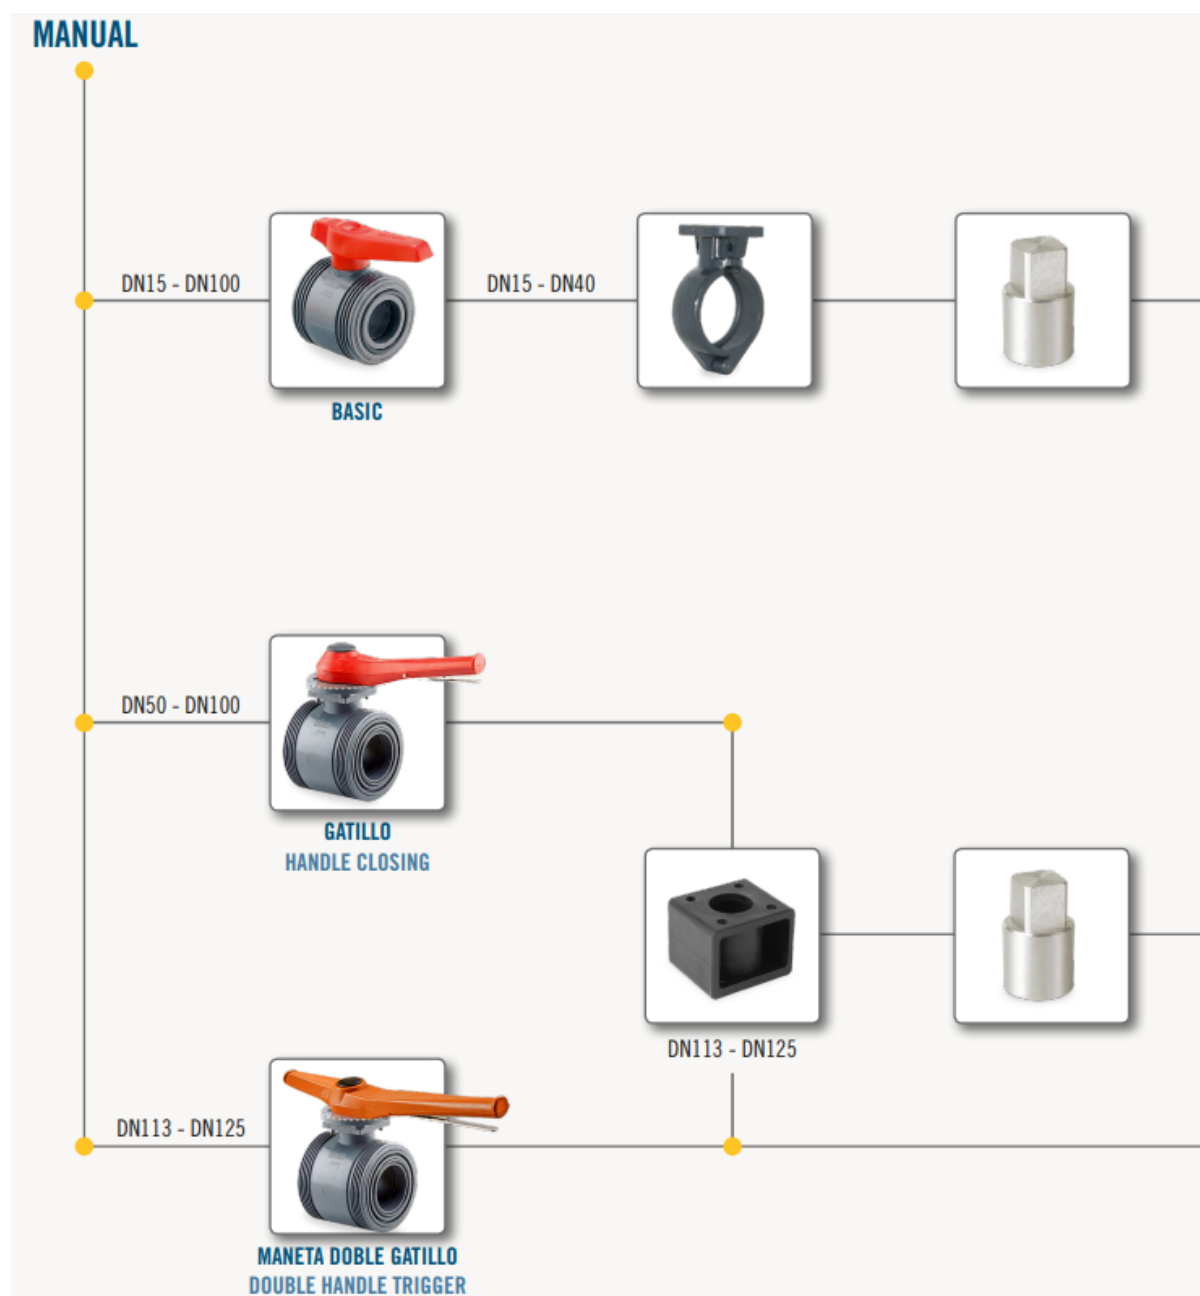

ISO 9001:2015 Accredited Company

Tel: +44(0)1386 552369

Fax: +44(0)1386 554227

sales@allvalves.co.uk

www.allvalves.co.uk

Allvalves Online Ltd, Automation House, Unit 2, Pershore, WR10 2DF UK

Dimensional Drawings and Additional Technical Specifications:-

TYPE: Accessories/Spares



Actuador eléctrico
Electric actuator

- 12-48 V.
- 80-240 V.
- Opción BSR
- Opción DPS



Actuador Neumático
Pneumatic actuator

- Simple Efecto / Simple effet
- Doble Efecto / Double effet



Encolar
Solvent socket outlet



R/H reforzada
Reinforced femal threaded outlet




R/M
Male threaded outlet



Netvitc®
Netvitc® outlet



PE fitting
Coupling fitting outlet



Bridas
Flange outlet



Encolar SNS®
SNS® adaptor

Conexión
Connection



Conexión
Connection

