



Main Features:-

- ◆ Wafer check valve, single disk
- ◆ DN15 to DN200 PN25 (PN40 up to 4")
- ◆ Installed with vertical, horizontal or inclined flow
- ◆ Working Temperature -20 to + 240C *

*Temperature and pressure determined by valve body, seat etc.

Suitable Applications & Approvals:



HVAC



OIL



GAS



INDUSTRY






SERIES: 80208

MANUFACTURER: **GENEBRE**

VALVE MATERIALS & DIMENSIONS

ITEM	SECTION	MATERIAL	ADDITIONAL INFO / OPTIONS
1	Body	SS 1.4408	Shot blasting
2	Spring Support	AISI 316	n/a
3	Spring	AISI 316	Spare Part Code: K 2415
4	Disc	SS 1.4408	Polished
5	Centring Ring	SS	n/a

REF	SIZE	DN	PN	D	A	B	C	L	Kg
80208-04	1/2"	15	40	39	34	15	33	16	0.085
80208-05	3/4"	20	40	46	41	20	40	19	0.122
80208-06	1"	25	40	54	49	25	47.5	22	0.198
80208-07	1 1/4"	32	40	70	62	32	59.5	28	0.38
80208-08	1 1/2"	40	40	81	71	40	68	32	0.52
80208-09	2"	50	40	94	85	48	81.5	40	0.775
80208-10	2 1/2"	65	40	113	102	62	97	46	1.24
80208-11	3"	80	40	132	123	75	117.5	50	1.865
80208-12	4"	100	40	150	140	95	134.5	60	2.65
80208-13	5"	125	25	187	177	118	169	90	5.5
80208-14	6"	150	25	217	205	140	196	136	8.3
80208-16	8"	200	25	274	261	185	245.5	140	16.1

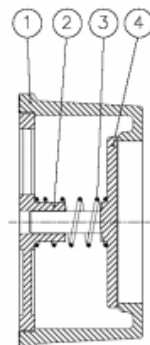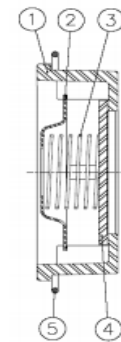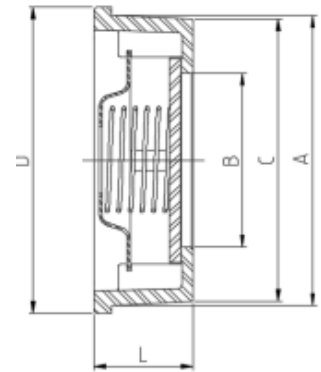

T +44 (0)1386 552369

E sales@allvalves.co.uk

W www.allvalves.co.uk

F +44 (0)1386 554227





Genebre are a global brand of industrial valves with large stocks held for fast delivery on various type of valves, sizes, end connections and materials.

SERIES: 80208

OPENING PRESSURE / Kv VALUES / PRESSURE & TEMP


REF	SIZE	mBar	REF	SIZE	Kv
80208-04	1/2"	24 ~ 30	80208-04	1/2"	4.9
80208-05	3/4"	24 ~ 30	80208-05	3/4"	8.8
80208-06	1"	24 ~ 30	80208-06	1"	11.2
80208-07	1 1/4"	24 ~ 30	80208-07	1 1/4"	20.7
80208-08	1 1/2"	24 ~ 30	80208-08	1 1/2"	29
80208-09	2"	24 ~ 30	80208-09	2"	40
80208-10	2 1/2"	24 ~ 30	80208-10	2 1/2"	57
80208-11	3"	20 ~ 26	80208-11	3"	85
80208-12	4"	20 ~ 26	80208-12	4"	92
80208-13	5"	30 ~ 36	80208-13	5"	192
80208-14	6"	30 ~ 36	80208-14	6"	255
80208-16	8"	30 ~ 36	80208-16	8"	425

KV VALUES:

- The Kv values (M3 per hour) is the flow of water at a temperature of 5C to 30C (41F to 86F) at p of 1 bar

- For further information, please email sales@allvalves.co.uk

PRESSURE AND TEMPERATURE CHART

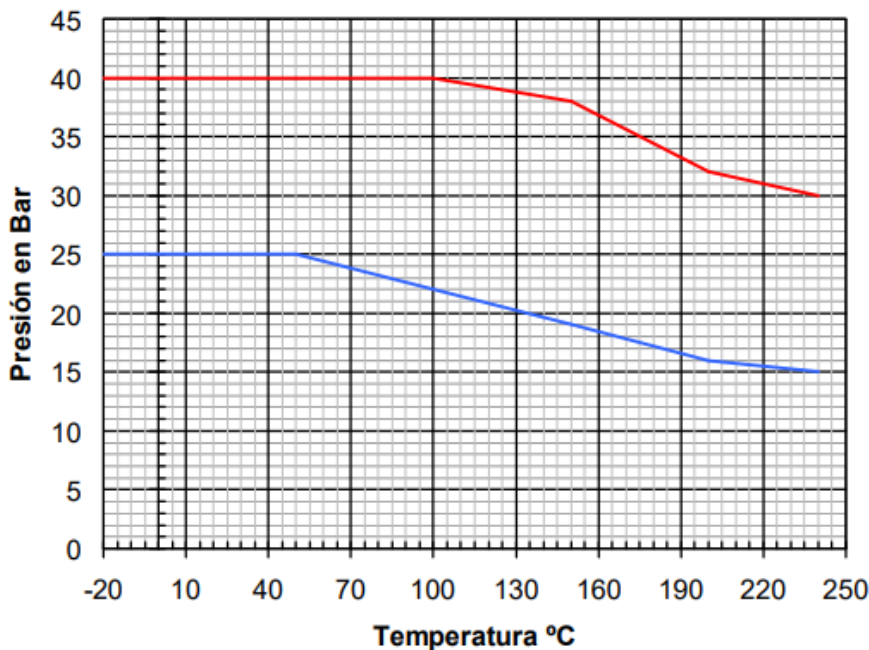

ALL VALVES

AllValves Online™ have used decades of experience in the valve industry to select a range of products that match the Allvalves Online ethos - value for money. All Valves Products are from reputable sources and have been sold in significant quantities for many years, are installed in a wide variety of applications, and are known to be durable in service.

GENEBRE

Genebre is a leading company and world reference in fluid control and high-quality taps. They control all the creation processes, responding to the specific needs of each market: from the initial concept and design of the product to the production and commercialization.



T +44 (0)1386 552369

E sales@allvalves.co.uk

W www.allvalves.co.uk

F +44 (0)1386 554227