



## Main Features:-

- ◆ Flanged PN16
- ◆ Cast Iron Epoxy Coated Body, Stainless Steel Screen
- ◆ Temperature -10°C to 120°C
- ◆ Mesh Sizes: 2" to 3" 1.5mm, 4" & 12" 3mm

\*Temperature and pressure determined by valve body, seat etc.




## Suitable Applications & Approvals:



### SERIES: 30170

MANUFACTURER: **AVOL**  
INDUSTRIAL VALVES

Name	Materials
Body	A216 Cast Iron
Disc	A216 Cast Iron
Cover	A216 Cast Iron
Screen	SS 304
Gasket	Teflon/Graphite
Plug	A216 Cast Iron

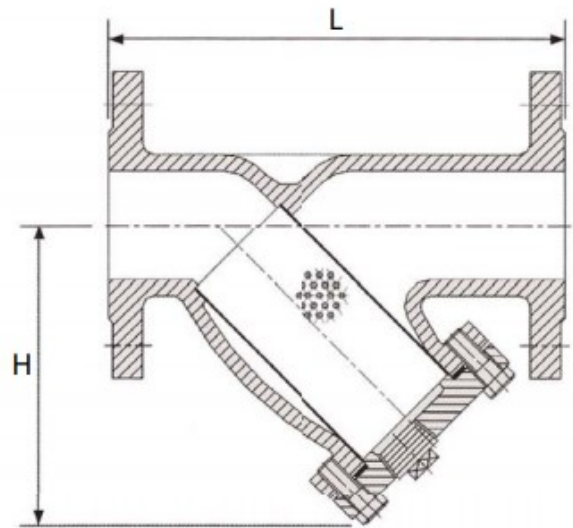

VALVE DIMENSIONS

Size	L	H	Plug	Mesh	Kg
2"	230	150	1/2"	1.5	10
2 1/2"	273	185	1"	1.5	26
3"	295	205	1"	1.5	23.5
4"	352	245	1"	3	34
5"	416	294	1 1/4"	3	52
6"	470	330	1 1/2"	3	70
8"	543	415	1 1/2"	3	110
10"	660	492	2"	3	185
12"	770	562	2"	3	295

## ALL VALVES ONLINE

Offering a full range of actuated valve packages, manual valve range, pipe fittings and pumps, we have a product for all your requirements. As an ISO 9001-2015 Quality Approved and certified company, All Valves offer a quality service from pre-sale to post sale. Shipping millions of pounds in value of manual valve and actuated valve packages all over the world since its formation, All Valves are a trusted valve and actuator supplier to many companies all over the world. Working with the leading brands in most industries.



T +44 (0)1386 552369

E sales@allvalves.co.uk

W www.allvalves.co.uk

F +44 (0)1386 554227